

Installation Quadoa network hardware license on server


Important: The next steps have to be accomplished **on the server** on which you would like to install or update the Quadoa Optical CAD license.

1. **Download** the **Sentinel Quadoa Runtime Vendor Library** from the Quadoa website under <https://www.quadoa.com/download>

For Windows: Install the **Quadoa Vendor Library** by opening the Windows command-line prompt and type in the command "`C:\PATH_TO_FILE\haspdinst_91313.exe -i`". For `C:\PATH_TO_FILE` insert the correct path to the `haspdinst_91313.exe`.

For Linux: Please follow the Readme instructions in the download folder.

2. Open the **Sentinel Admin Control Center** (ACC) by typing in the browser <http://localhost:1947/>
3. Click on **Configuration** and open the **Access from Remote Clients** tab. Under Allow Access from Remote Clients activate **"All licenses are accessible without need of identity"** and click on **Submit**.

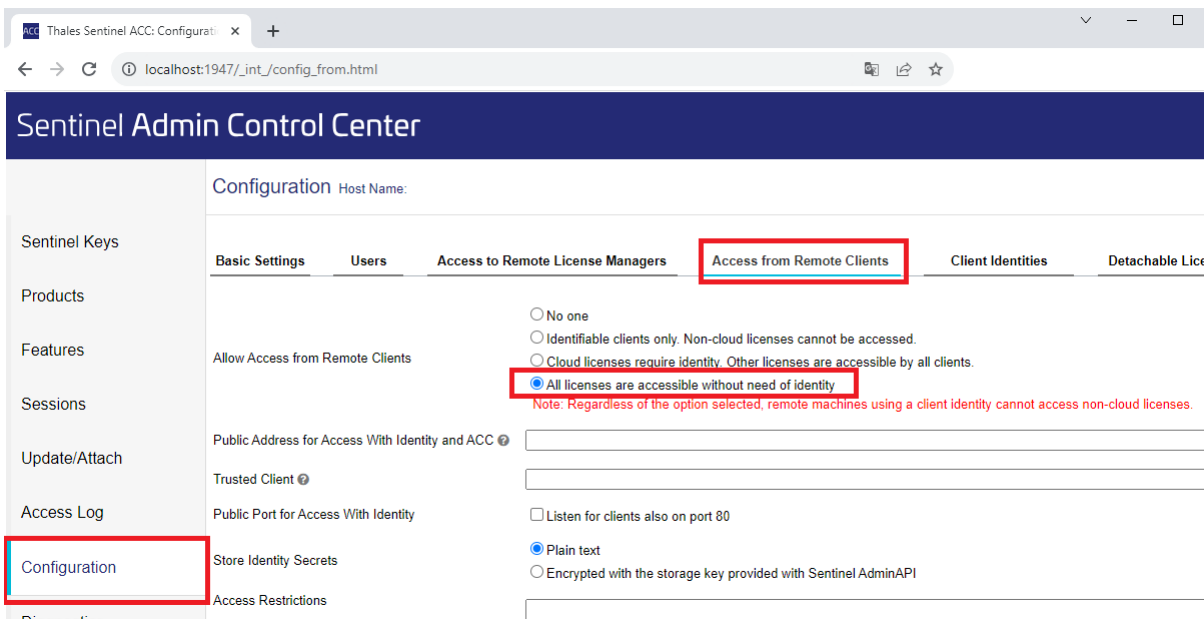

The screenshot shows the Sentinel Admin Control Center (ACC) Configuration page. The browser address bar indicates the URL is `localhost:1947/_int_/config_from.html`. The page title is "Sentinel Admin Control Center". The "Configuration" menu item in the left sidebar is highlighted with a red box. The "Access from Remote Clients" tab is selected and highlighted with a red box. Under "Allow Access from Remote Clients", the radio button "All licenses are accessible without need of identity" is selected and highlighted with a red box. A red note below this option states: "Note: Regardless of the option selected, remote machines using a client identity cannot access non-cloud licenses." Other options include "No one", "Identifiable clients only. Non-cloud licenses cannot be accessed.", and "Cloud licenses require identity. Other licenses are accessible by all clients." The "Public Address for Access With Identity and ACC" field is empty. The "Trusted Client" field is empty. The "Public Port for Access With Identity" checkbox is unchecked. The "Listen for clients also on port 80" checkbox is unchecked. The "Store Identity Secrets" radio button "Plain text" is selected. The "Access Restrictions" field is empty.

4. **Connect the Quadoa Optical CAD USB-dongle** to your server.



5. The installation on the server is done. Continue with the installation of Quadoa on the client-computer following the guide "**Installation Guide - network license (Client Instructions) (PDF)**" which you can find in the Quadoa Download Center at www.quadoa.com/download